

## Combo

The versatility and reliability union



CONNECT.series<sup>®</sup>


MULTIPLY YOUR POSSIBILITIES

# Combo model

2 in 1 COMBO MACHINE

NETWORK CONNECTION

INTELLIGENT SOFTWARE

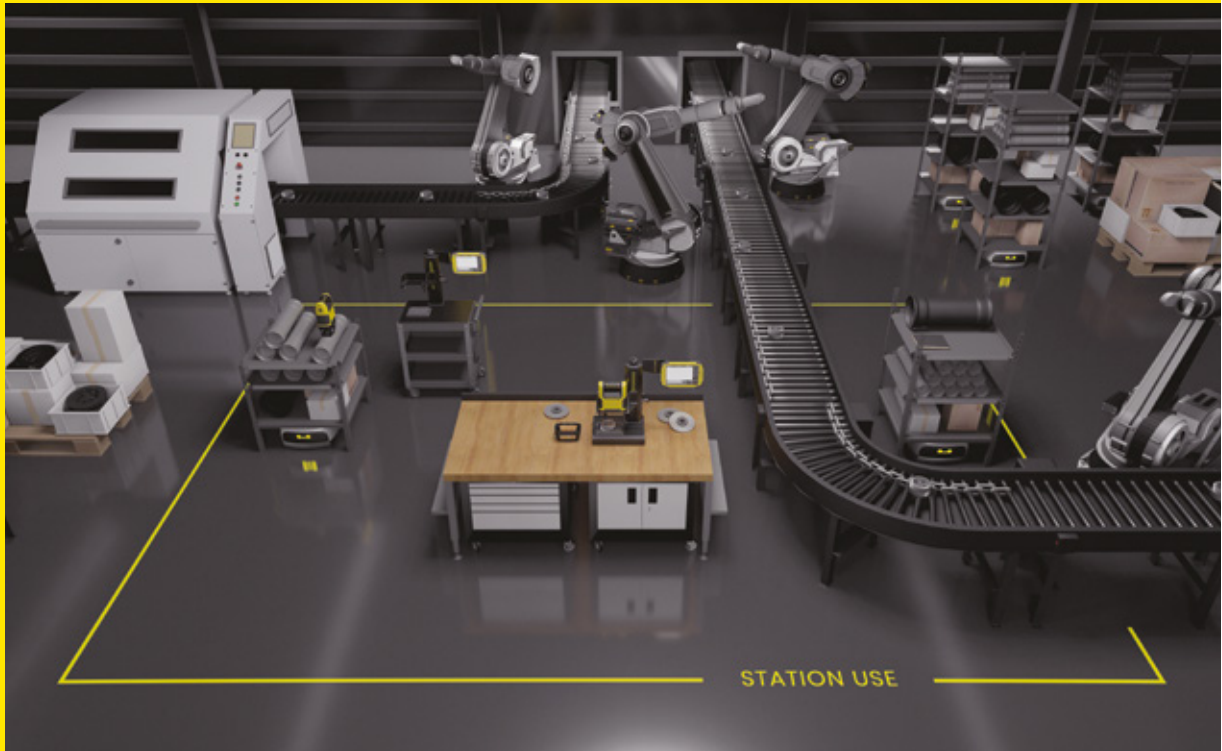

We have rethought the way we design and develop our products. Today, our marking solutions are the result of direct customer feedback across a wide range of applications.



## Station use

1.

The parts to be marked are taken to a marking area

2.

The machine is located on a workbench

3.

Ability to create multiple marking areas in the workshop



## Electromagnetic dot peen technology

- Indent the material through a succession of impacts that form a permanent mark
- On all types of part up to a hardness of 63HRC

# BENCHTOP MODE

## Make the choice for precision



### Marking of small to medium-sized parts

up to 290 mm high as standard, optional 150 mm column extension

### Quick Shift function

Easy and quick height adjustment of the column when changing to different sized parts

### Marking window

120 x 60 mm

### Ergonomic base

Mounting of various accessories: plate holder, rotary axis and other clamping systems

### Easy Shift function

Stylus simultaneously moves as the text is re-positioned on screen



Illuminated marking area



Protective bumpers



Technical plastic shell

### Intelligent Driving Impact (IDI)

Unique function automatically adjusts distance between part and stylus during marking enabling **marking over uneven surfaces from 3-8mm in height**





## 2 in 1 machine

Switch from a portable to a benchtop mode in less than 10s

### PORTABLE MODE

# Mark with complete freedom


Marking of medium to large, heavy or difficult to access parts



### Energy self-sufficient


22V lithium ion battery in the head

Light to deep marking, moderate use

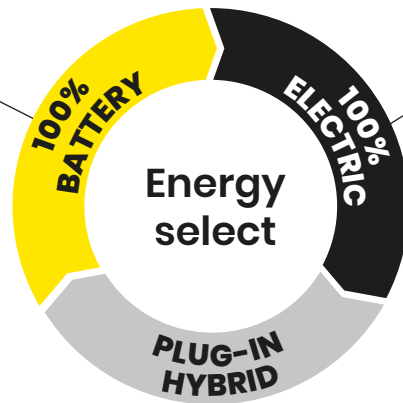

Deep marking, intensive use and benchtop mode

To ensure continuity of production in case of low battery

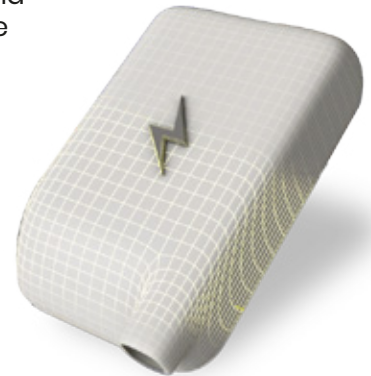

### Support foot

5 en 1

1. Marking on small and large cylinders with two pairs of locating V's
2. Positioning support with support guide
3. Magnetic support with magnets
4. Marking on flat parts
5. Non-slip-foot



### Wireless communication

between marking head and controller



- Freedom of movement within 10m
- Secure Wi-Fi connection protocol
- Automatic pairing with RFID technology



Light: 3.2 kg



360° use



# CONTROLLER & SOFTWARE

## Mark within 3 clicks

### CONNECT.series®



#### Intelligent software

developed by Technomark


- Predictive maintenance module
- 3 user modes: operator, supervisor and administrator
- Licence pack for more functionality
  - USB Production Tracker license
  - Font creator license
  - Custom HMI license
  - RFID log on head or control box license
- Visualisation of the marking area on the screen
- Control of the rotary axis connected to the head



10" touch screen in tempered glass




Intuitive and easy to use



#### Network connection

data exchange via the Ethernet port

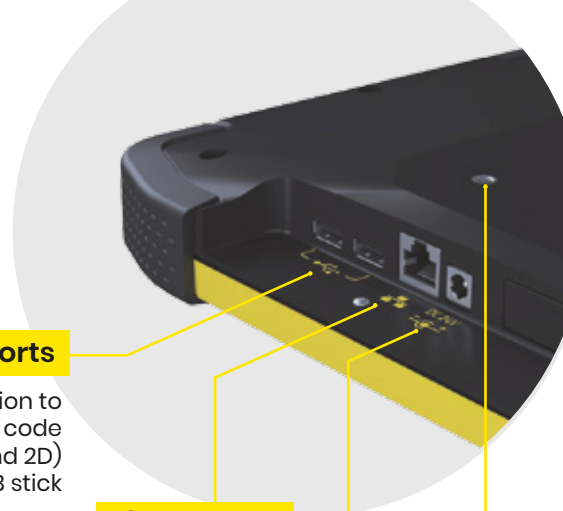

#### 3 USB ports

Connection to keyboard, code reader (1D and 2D) and USB stick

#### Ethernet port

#### 220V power supply

#### VESA 100 fixings

Universal mounting that allows a range of control box fixing solutions

### 3 complete marking solutions developed by Technomark

Full holder

Upgraded holder

Light holder



OUR ADDED VALUE

# Long-term support

## Pre-sale



FEASIBILITY  
STUDY



SAMPLES  
MARKING



ON-SITE  
TESTING



CUSTOMIZATION

## After sales



HELPLINE



TRAINING



SERVICE AND  
MAINTENANCE CONTRACT



REPAIR



LOAN OF  
EQUIPMENT

**TECHNO**mark<sup>®</sup>  
——— smart traceability



### Technomark

1, allée du développement  
42350 La Talaudière - France  
+33 (0)4 77 22 25 91  
info@technomark-marking.com

[www.technomark-marking.com](http://www.technomark-marking.com)



**47** countries

WORLDWIDE PRESENCE THROUGH OUR  
DISTRIBUTORS AND 3 SUBSIDIARIES

**99%**

AVERAGE CUSTOMER SATISFACTION  
RATE OVER 3 YEARS

**20 000**

YELLOW MACHINES IN SERVICE  
WORLDWIDE, ALL TECHNOLOGIES

**10%**

OF TURNOVER DEDICATED TO R&D

